

Jabra PanaCast 50

User manual



© 2021 GN Audio A/S. All rights reserved. Jabra® is a trademark of GN Audio A/S. The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by GN Audio A/S is under license.

Made in Malaysia

MODEL: VSM020



Declaration of Conformity can be found on www.jabra.com/doc

1. Welcome.....	5	7. Software	19
2. Overview.....	6	7.1 Operating systems	
2.1 Jabra PanaCast 50 overview		7.2 Jabra Direct (Windows or macOS)	
2.2 Included accessories		7.3 Jabra Xpress (Windows or macOS)	
2.3 Optional accessories		7.4 Jabra Sound+ (iOS or Android)	
2.4 Dimensions		7.5 Microsoft Teams and Teams Rooms	
3. Visual indicators.....	11	7.6 Zoom and Zoom Rooms	
4. Room setup guide	12	7.7 Other compatible video conferencing applications	
5. Mounting options	13	8. Remote management setup... 25	
5.1 Wall Mount installation		8.1 Quick startup wizard in Jabra Direct	
5.2 Screen Mount installation		9. Video conferencing features... 28	
5.3 Table Stand installation		9.1 Camera controller in Jabra Direct and Jabra Sound+	
5.4 Installation height		9.2 Intelligent Zoom	
6. Cabling	17	9.3 Virtual Director	
6.1 Room system cabling		9.4 Safety capacity settings	
6.2 Bring-your-own-device (BYOD) cabling		9.5 Save Pan, Tilt, Zoom presets	

9.6	Image quality settings	
9.7	Video flicker	
9.8	Field of view	
9.9	Video stitching	
9.10	Update firmware	
10.	Whiteboard	35
10.1	Position the whiteboard	
10.2	Set up whiteboard view	
10.3	Share the whiteboard in the main camera view	
10.4	Share a separate view of the whiteboard in Microsoft Teams Rooms	
10.5	Share a separate view of the whiteboard in Zoom Rooms	
11.	Remote control (optional accessory).....	41
11.1	How to pair the remote control	
11.2	How to use the remote control	
12.	Support	43
12.1	FAQ and technical specifications	
12.2	How to care for your Jabra device	
12.3	How to factory reset	

1. Welcome

Thank you for using the Jabra PanaCast 50. We hope you will enjoy it!


Jabra PanaCast 50 features

- **Inclusive meetings.** Panoramic-4K video using three 13-megapixel cameras and patented real-time video stitching to give 180° coverage, for a more natural view of the huddle room.
- **Intelligent video technology.** Intelligent Zoom automatically includes everyone in the conversation, while Vivid HDR ensures the best video experience, even under widely varying lighting conditions.
- **Instant collaboration.** Plug-and-play technology lets you collaborate with others quickly and easily, bringing hassle-free video and audio to your huddle room.
- **Versatile compatibility.** Compatible with all leading video and audio-conferencing solutions. Certified for use with Microsoft Teams Rooms, Zoom and Zoom Rooms.


2. Overview

2.1 Jabra PanaCast 50 overview

FRONT SIDE

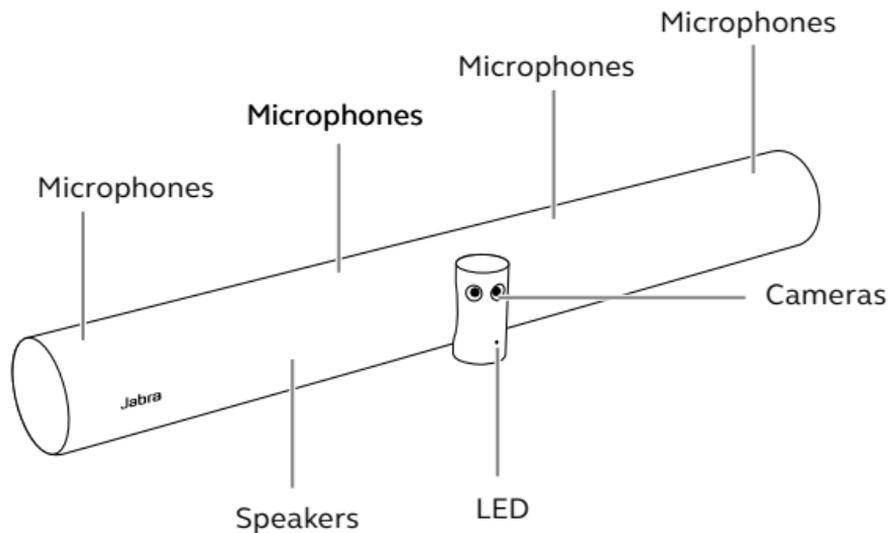


BACK SIDE

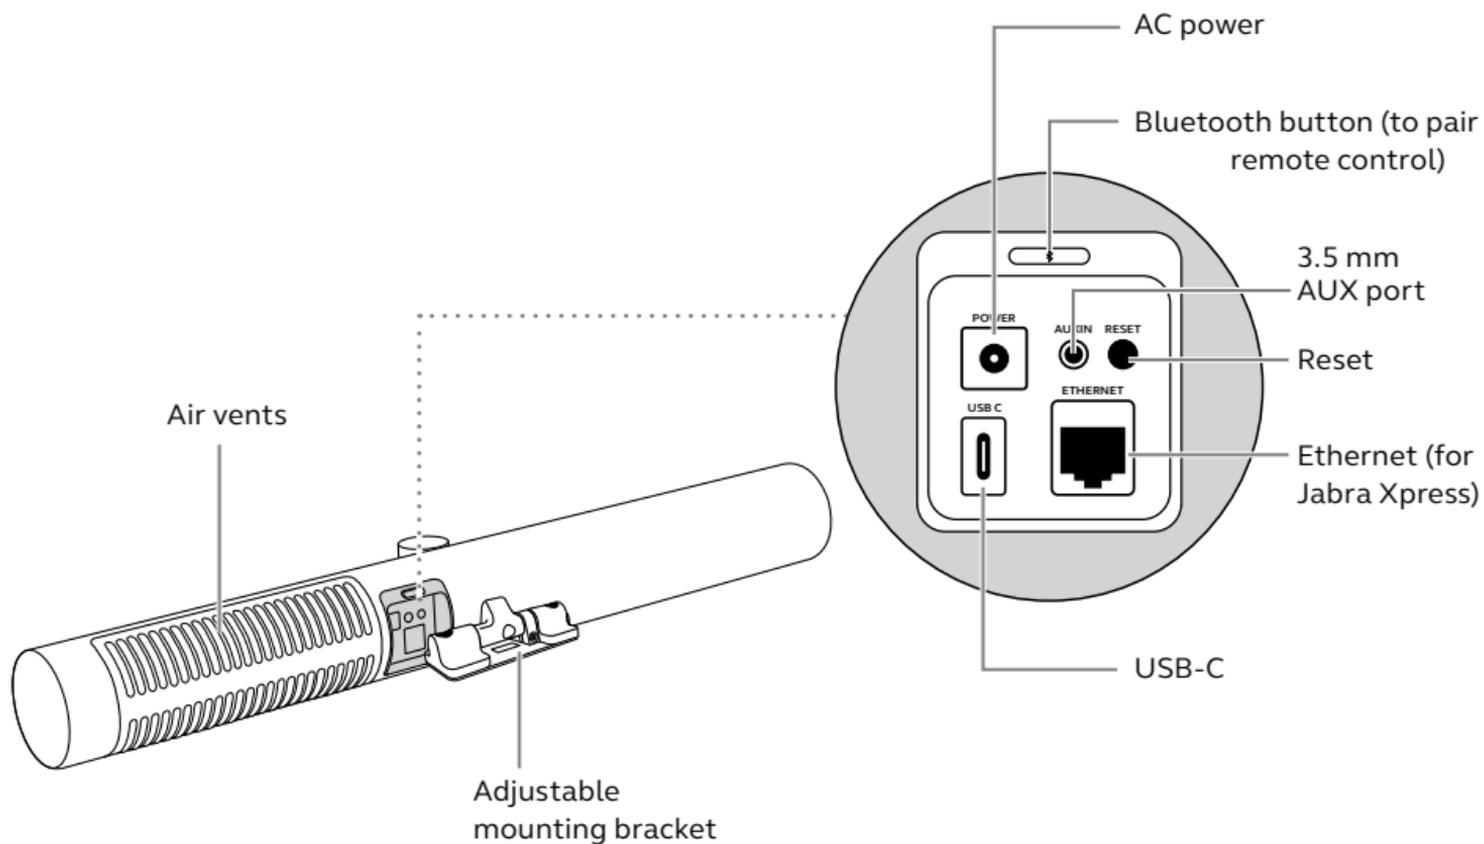


2.2 Included accessories


Additional accessories can be purchased at jabra.com/accessories.

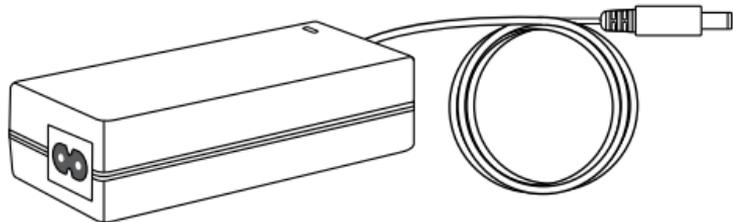


AC power adapter (2m/6ft)



Wall Mount

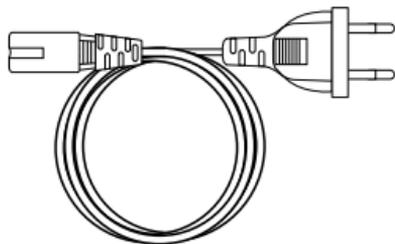

AC power cable
(1m/3ft)



USB-C cable
(2m/6ft)




2 screws
(M5x12)

Hardware not included:

- Drywall screws and anchors
- Masonry screws

2.3 Optional accessories

Accessories can be purchased at jabra.com/accessories.

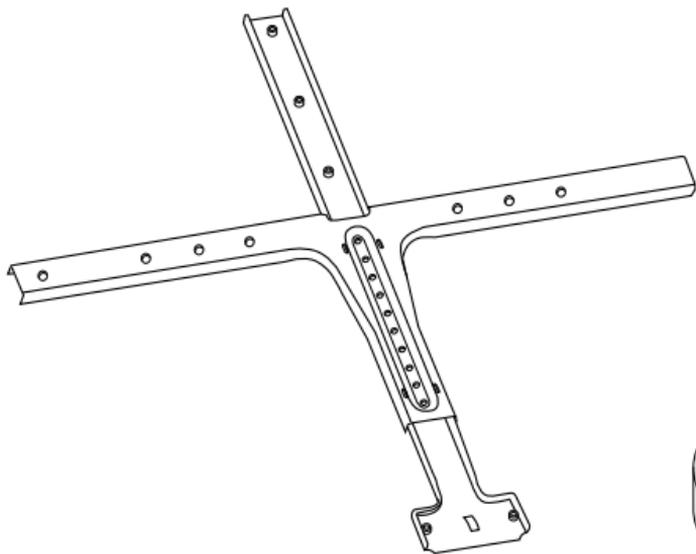

Screen Mount



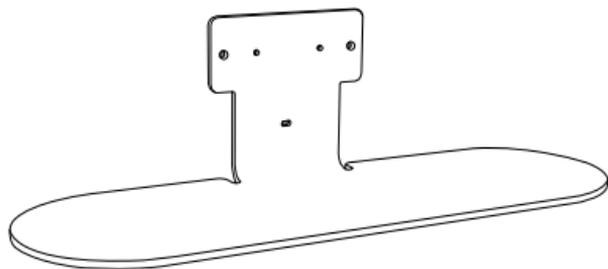


Table Stand







Remote control





**USB-C cable
(5m/15ft)**

2.4 Dimensions

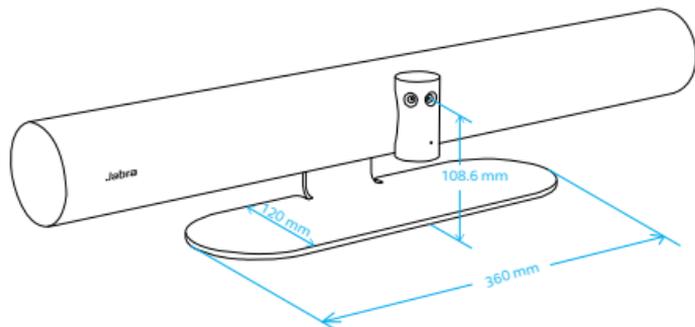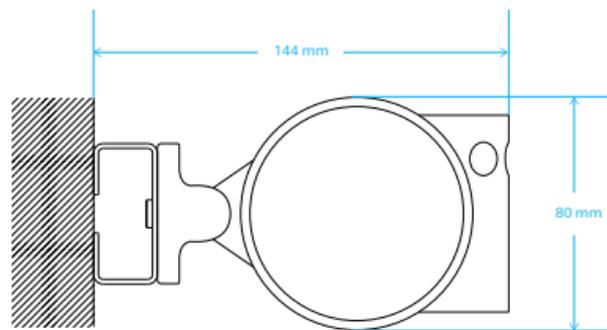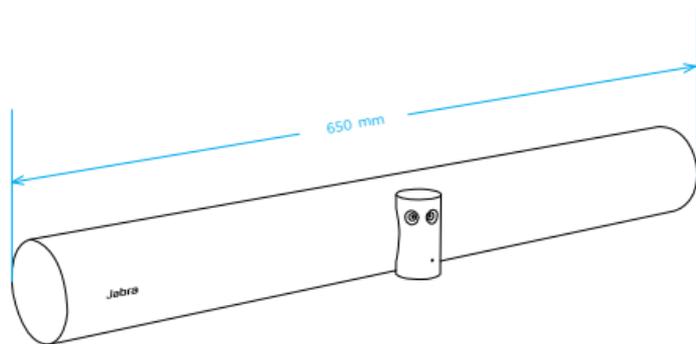

3. Visual indicators

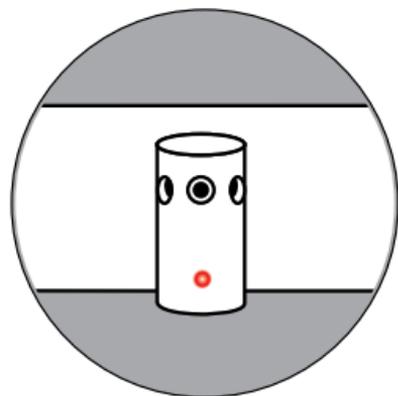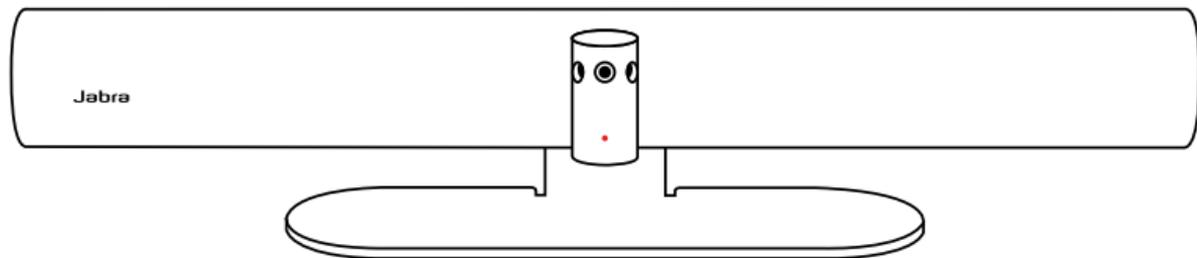

LED STATUS

Off or not streaming	(LED off)
Starting up	○ (pulsing white)
Connected	○ (on for 3 seconds)
In call or streaming video/media	○
In call, audio muted	●
Room capacity notification	● (pulsing red)
Pairing remote control	● (flashing green and blue)
Firmware updating	● (flashing pink)

4. Room setup guide

The Jabra PanaCast 50 is designed for meeting rooms up to 4.5 meters x 6 meters (15 feet x 20 feet) and can be mounted using the supplied Wall Mount or the optional Screen Mount or Table Stand. If a whiteboard will be used in the meeting room, ideally it should be positioned on the adjacent wall for optimal viewing.

View the Room setup guide PDF here: jabra.com/help/panacast50/getstarted


Below are some typical room setup scenarios.



5. Mounting options

5.1 Wall Mount installation


View the Wall Mount assembly video or PDF here:
jabra.com/help/panacast50/getstarted

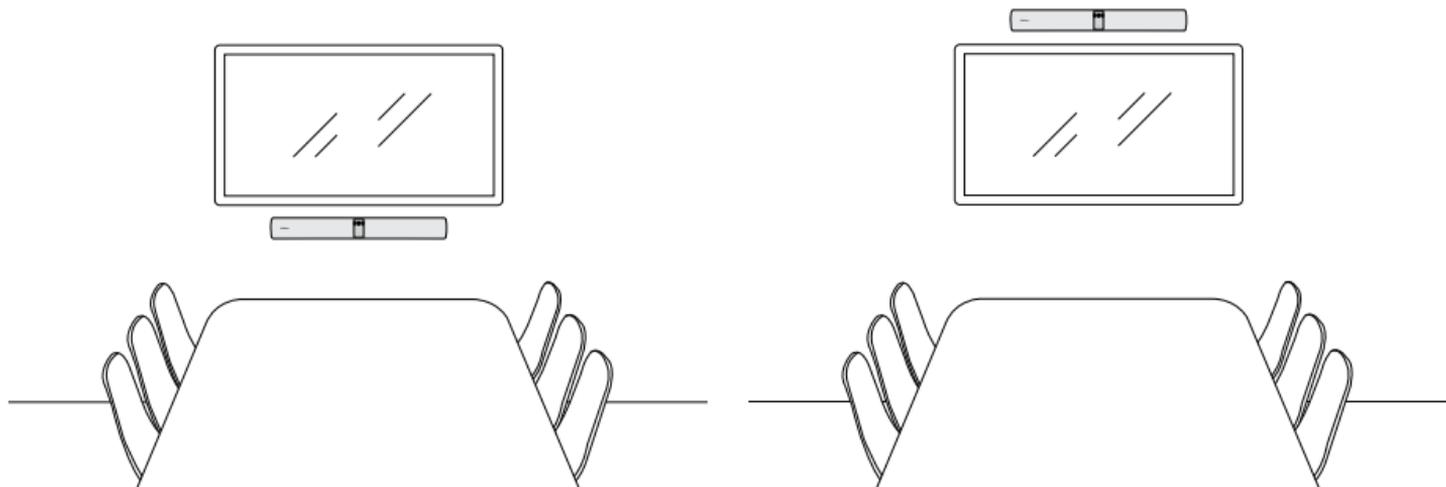

5.2 Screen Mount installation


The Screen Mount is designed for screens up to 220 centimeters (86 inches) and VESA mounts up to 600 millimeters.

View the Screen Mount assembly video or PDF here:
jabra.com/help/panacast50/getstarted

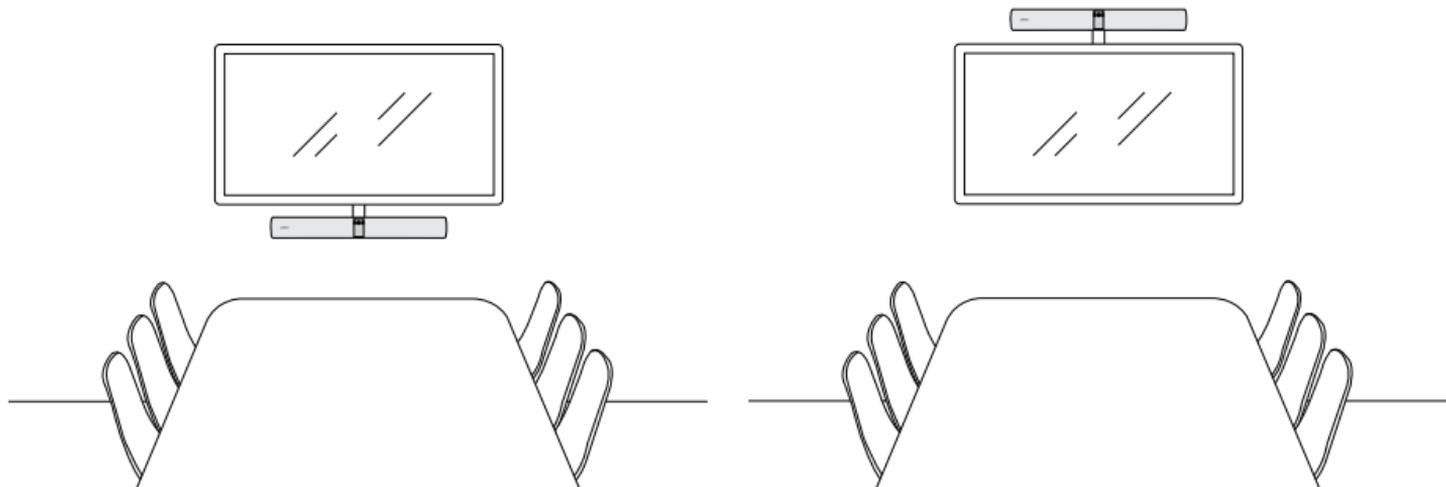

5.3 Table Stand installation


View the Table Stand assembly video or PDF here:
jabra.com/help/panacast50/getstarted

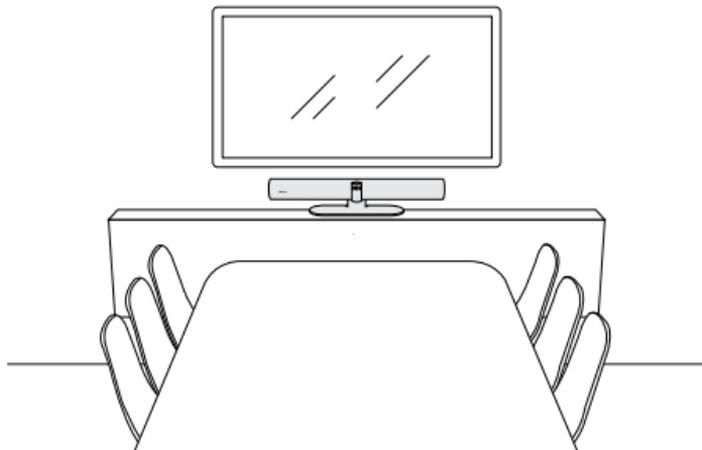

5.4 Installation height

It is recommended to install the Jabra PanaCast 50 at eye-level of the meeting room participants.

When installing the PanaCast 50 with the Wall Mount or Screen Mount, the camera should be positioned 8 centimeters (3 inches) below the screen and ideally 30-35 centimeters (12-14 inches) above the table top or 100 centimeters (3 feet) from the floor. If this height is not possible, it is recommended to install the Jabra PanaCast 50 above the screen.

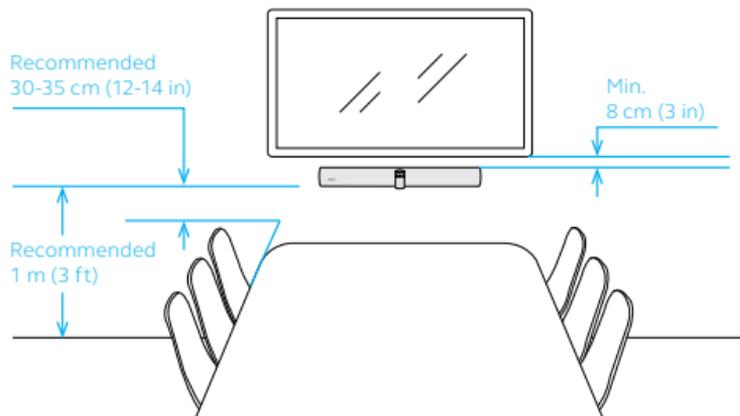


Do not mount the camera facing direct sunlight as this may affect the preset white balance and compromise the image.


6. Cabling

The Jabra PanaCast 50 is versatile and can be used with a Microsoft Teams Room or Zoom Room systems, or bring-your-own-devices (BYOD). It is recommended not to use USB extender cables.

6.1 Room system cabling

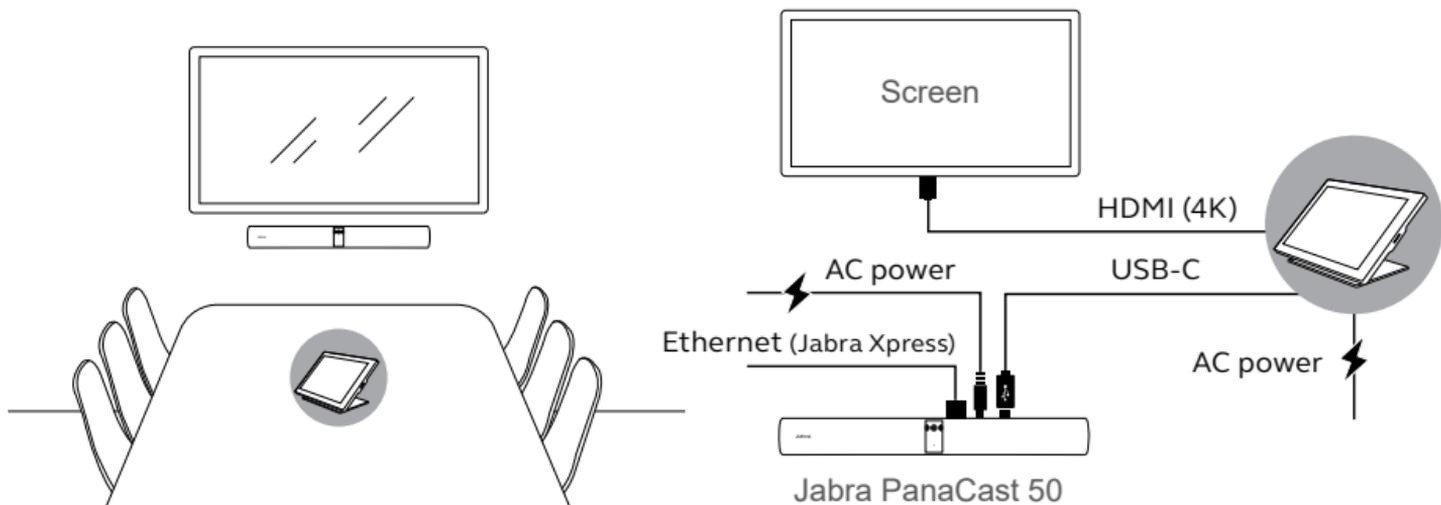

6.2 Bring-your-own-device (BYOD) cabling

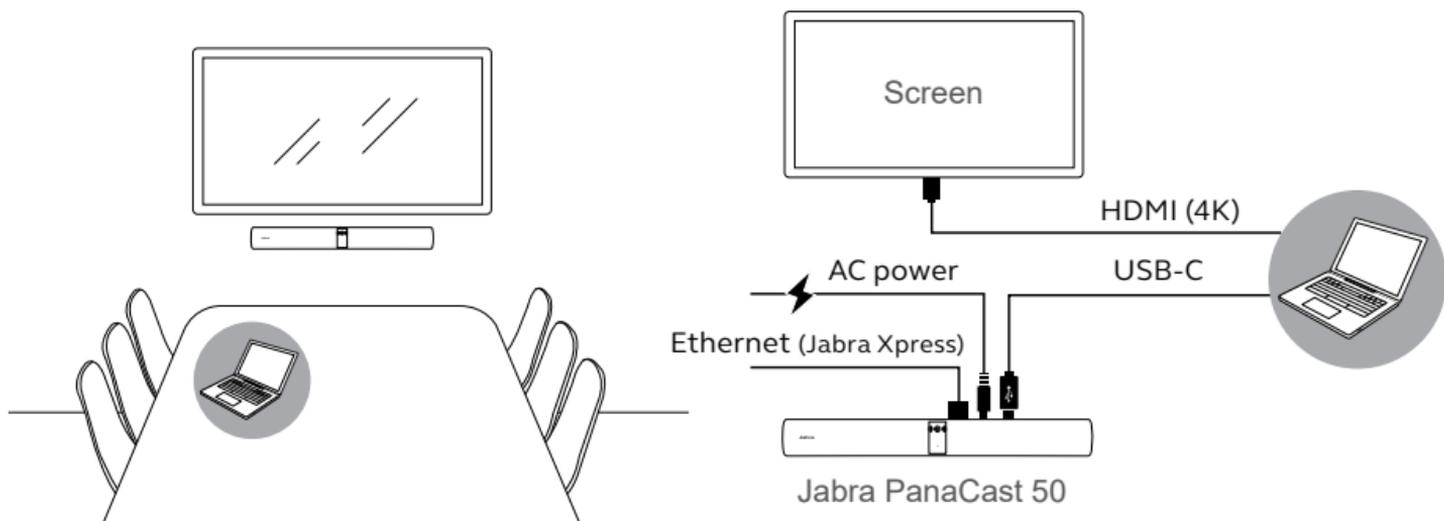


7. Software

7.1 Operating systems

Jabra PanaCast 50 supports Windows 10 or later, and macOS 10.15 or later, and does not require extra drivers.

7.2 Jabra Direct (Windows or macOS)

Jabra Direct is free desktop software designed to support, manage and enable optimal functionality for Jabra devices. Jabra Direct features a camera controller that can be used as a remote control for the Jabra PanaCast 50 (refer to section 9.1 for more info).

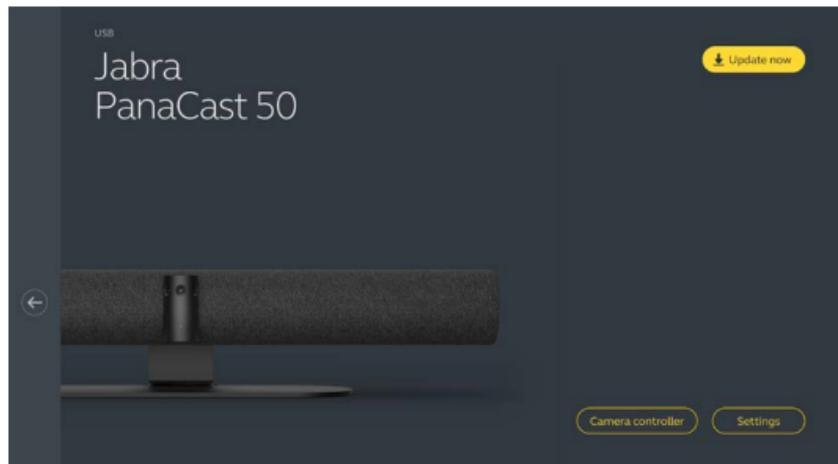

Download the latest free version from jabra.com/direct


7.3 Jabra Xpress (Windows or macOS)

Jabra Xpress is free desktop software designed to mass deploy and manage multiple Jabra devices across an organization. Jabra Xpress can track safety capacity limits and provide detailed insights about device usage.

Visit jabra.com/xpress to get access to Jabra Xpress

7.4 Jabra Sound+ (iOS or Android)

Jabra Sound+ is a free app for iOS or Android phones that can be used as a remote controller for the Jabra PanaCast 50.

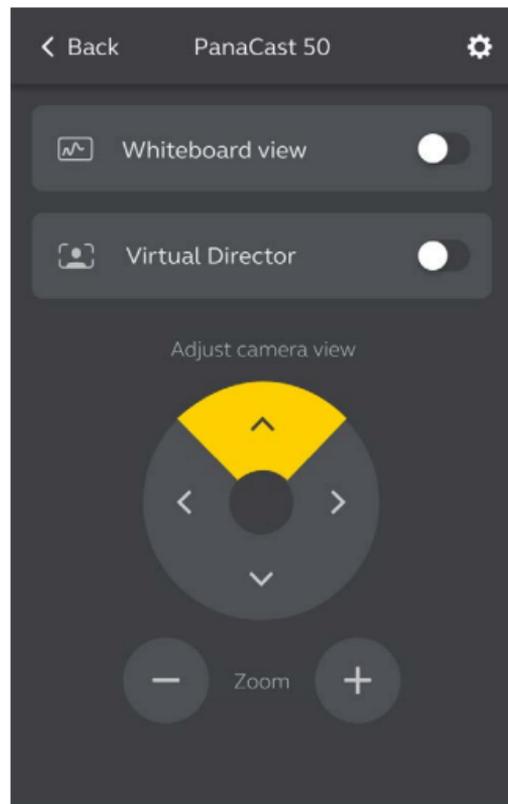

7.5 Microsoft Teams and Teams Rooms

Microsoft Teams or Microsoft Teams Rooms will automatically detect and set the Jabra PanaCast 50 as the default video and audio device.

To manually set the Jabra PanaCast 50 as the default video and audio device in Microsoft Teams or Teams Rooms, follow the steps below.

1. Launch Microsoft Teams or Microsoft Teams Rooms.
2. Click your account profile icon in the top right corner of Microsoft Teams.
3. Select **Settings** to open the settings menu.
4. Select the **Devices** tab in the menu list.
5. Under **Camera** and **Audio devices**, select **Jabra PanaCast 50**.

For more help, refer to the Microsoft Teams help center.

7.6 Zoom and Zoom Rooms

Zoom or Zoom Rooms will automatically detect and set the Jabra PanaCast 50 as the default video and audio device.

To manually set the Jabra PanaCast 50 as the default video and audio device in Zoom or Zoom Rooms, follow the steps below.

1. Launch Zoom or Zoom Rooms.
2. Click your wheel icon in the top right corner of Zoom to open the settings menu.
3. In the **Video** and **Audio** tabs, select **Jabra PanaCast 50** as the camera and speaker.

For more help, refer to the Zoom help center.

7.7 Other compatible video conferencing applications




When using the Jabra PanaCast 50 with other compatible video conferencing applications, ensure it has been manually set as the default video and audio device in the video/audio settings for the video conferencing application.

8. Remote management setup

With Jabra Xpress and an ethernet connection, a Jabra PanaCast 50 can be remotely managed without the need of Jabra Direct or the need to be connected to a computer. This means the Jabra PanaCast 50 will automatically apply managed settings and will always be updated to the firmware selected.


8.1 Quick startup wizard in Jabra Direct

When first connecting a Jabra PanaCast 50 to a computer that has Jabra Direct installed, a Quick startup wizard will automatically launch. This wizard will setup the Jabra PanaCast 50 to be remotely managed by Xpress and will guide you through the steps of naming your device, enabling Xpress management through an ethernet connection, and linking to a valid Xpress package URL. As an extra layer of protection, a password can be created to protect the Jabra PanaCast 50 settings.

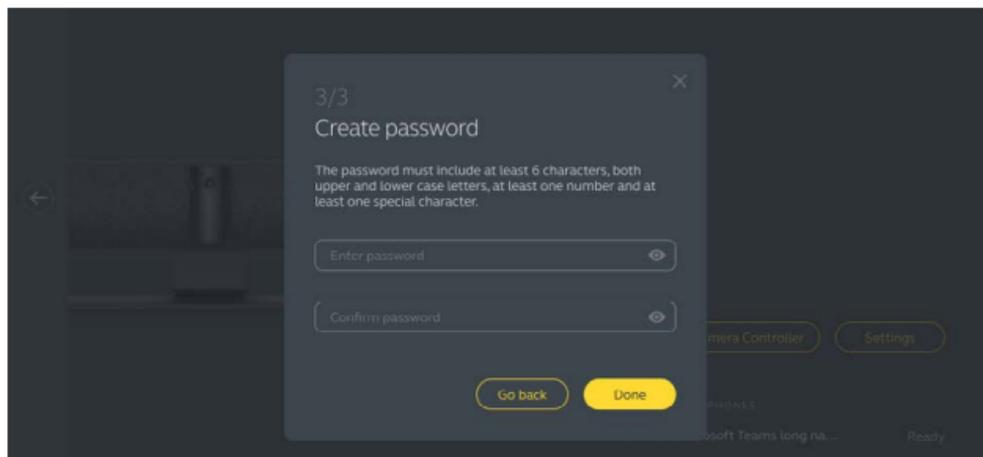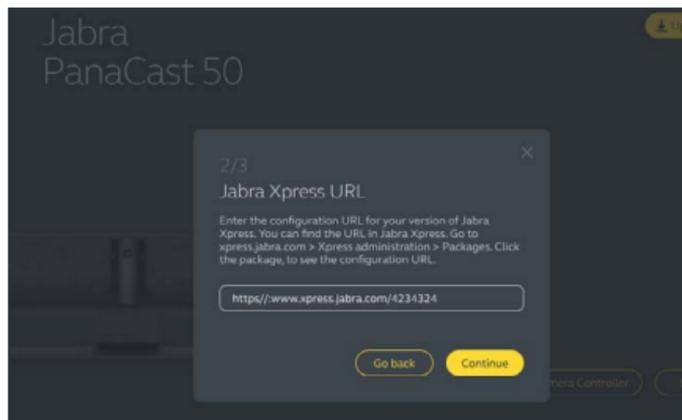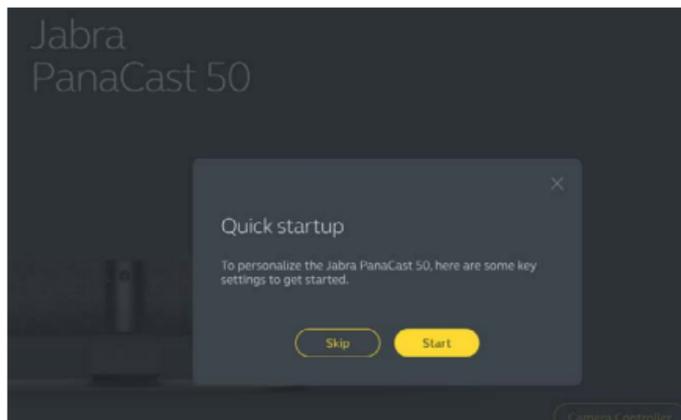

The Quick startup wizard settings can be changed at any time using Jabra Direct.

1. Launch Jabra Direct and ensure the Jabra PanaCast 50 is selected.
2. Select **Settings** to open the settings menu.
3. Change the appropriate settings for Jabra Xpress remote management.
4. Press **Save** to apply the changes to the Jabra PanaCast 50. The Jabra PanaCast 50 will reboot and the changes will take effect.

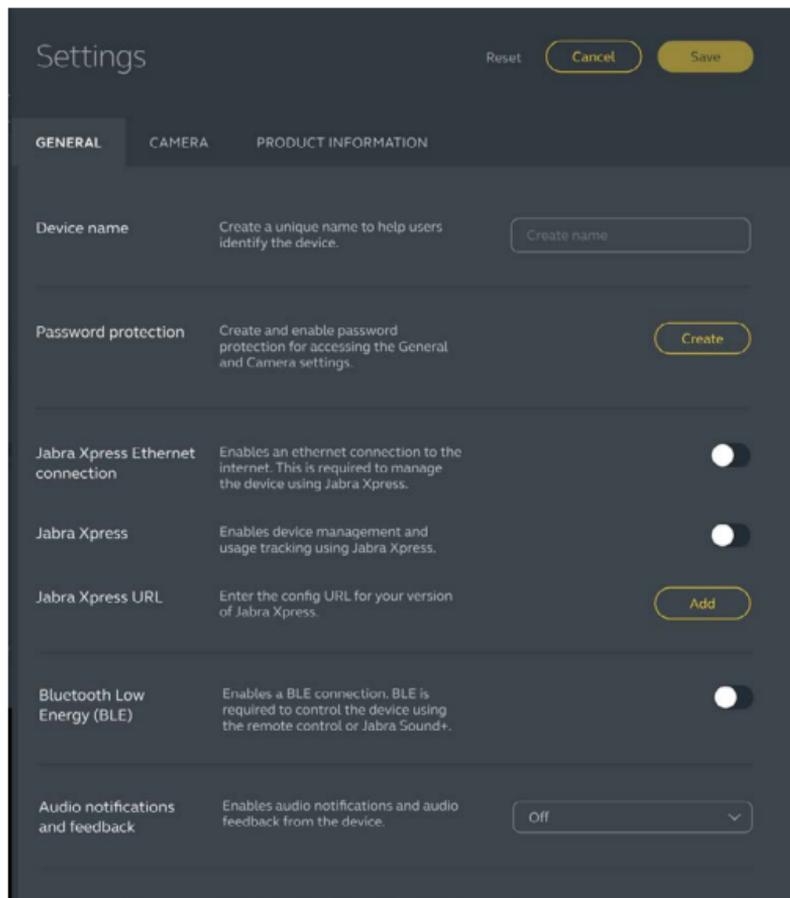


9. Video conferencing features

9.1 Camera controller in Jabra Direct and Jabra Sound+


The camera controller is a tool in Jabra Direct and Jabra Sound+ that enables users to remotely control a Jabra PanaCast 50 using their computer, phone or tablet.

The camera controller allows users to:

- Use Automatic zoom modes (Virtual Director or Intelligent Zoom).
- Set up and share the view of a whiteboard.
- Adjust the camera view using Pan, Tilt, Zoom controls.
- Adjust the image quality settings (e.g. brightness, saturation, etc.).
- Select and customize Presets to suit their individual requirements.

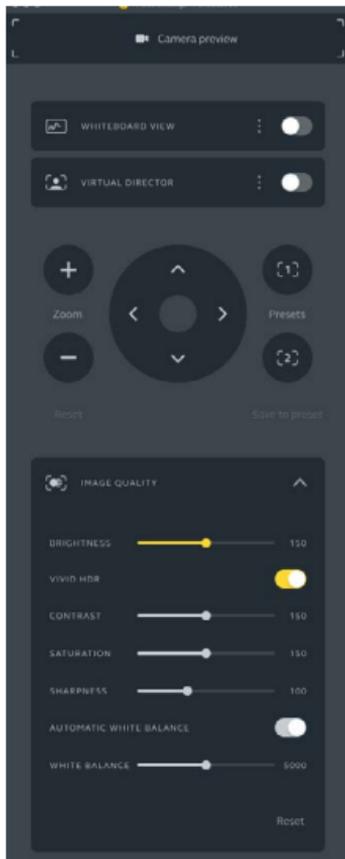

Jabra Direct camera controller

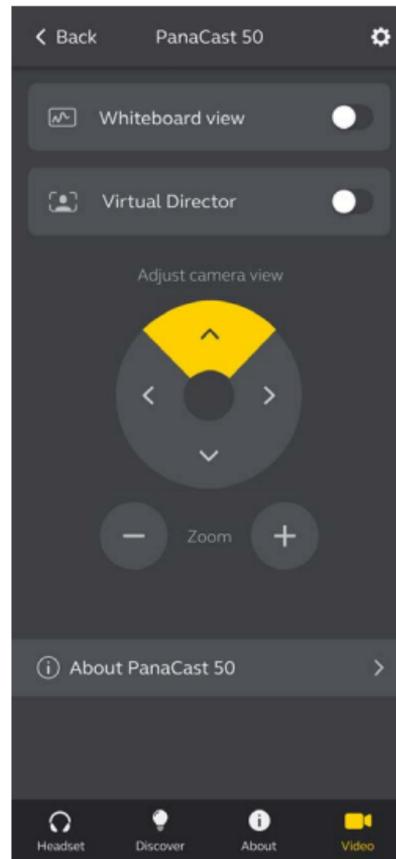

Jabra Sound+ camera controller

9.2 Intelligent Zoom

Intelligent Zoom is an Automatic zoom mode that dynamically frames all visible people within 4.5 meters (15 feet).

Users can access Intelligent Zoom by using the camera controller in Jabra Direct, Jabra Sound+ or by using the remote control. Only one Automatic zoom mode can be active at a time.

By default, **Automatic zoom mode** is set to Intelligent Zoom.

9.3 Virtual Director

Virtual Director is an Automatic zoom mode that features Speaker tracking, focusing on whomever is speaking in the camera view.

Users can access Virtual Director using the camera controller in Jabra Direct or Jabra Sound+. Only one Automatic zoom mode can be active at a time.

By default, **Automatic zoom mode** is set to Intelligent Zoom, but can be changed to Virtual Director.

9.4 Safety capacity settings

Using Jabra Direct, it is possible to set a safety capacity limit for a meeting room. If a safety capacity limit has been set, the Jabra PanaCast 50 will automatically detect if the limit is exceeded using PeopleCount technology and can alert people in the meeting room in real time. This anonymous PeopleCount data can be tracked and managed using Jabra Xpress.

PeopleCount technology detects the heads and bodies of any brightly-lit visible people within 1-4 meters of the camera (3-12 feet) with an accuracy rate of 75%+.

By default, **Safety capacity notifications** are set to Off. This setting can be configured using Jabra Direct, and the data can be tracked and managed using Jabra Xpress.

9.5 Save Pan, Tilt, Zoom presets

Pan, Tilt, Zoom presets allow users to adjust and save the camera view using the camera controller on Jabra Direct, Jabra Sound+ or by using the remote control. Saved presets do not overwrite the default Pan, Tilt, Zoom settings. Users can select saved presets when a new meeting starts.

Editing permissions for presets can be locked using Jabra Direct.

9.6 Image quality settings

The image brightness, contrast, saturation, sharpness, and white balance can be adjusted using the camera controller in Jabra Direct.

Additionally, Vivid HDR and Automatic white balance can be enabled. If Vivid HDR is enabled, contrast, saturation, and sharpness cannot be adjusted manually. If Automatic white balance is enabled, the white balance cannot be adjusted manually.

9.7 Video flicker

Video flicker can occur if the Jabra PanaCast 50 is not set to the correct geographical region. To prevent video flicker, select Auto (50Hz/60Hz) for regions that support NTSC format, or 50Hz for regions that support PAL format.

By default, **Video flicker** is set to Auto. This setting can be configured using Jabra Direct.

9.8 Field of view

The angle of the camera can be optically adjusted for a wider or narrower view of the meeting room.

By default, **Field of view** is set to 180°. This setting can be adjusted using Jabra Direct.

9.9 Video stitching

To create a 180° camera view, video stitching is used to join the overlapping areas of the video. Video stitching works best between 60 centimeters (24 inches) and 5 meters (16 feet) from the camera.

The Jabra PanaCast 50 has two methods for video stitching: Blend and Hybrid.

9.10 Update firmware

Firmware updates improve performance or add new functionality to Jabra devices. Jabra Direct is required to update the firmware of the Jabra PanaCast 50.

If a firmware update is available, you will be notified whenever the Jabra PanaCast 50 is connected to a computer that has Jabra Direct installed.

10. Whiteboard

The 180° field of view of the Jabra PanaCast 50 allows whiteboard content to be shared in real time, even if the whiteboard is angled sharply away from the camera. Intelligent software automatically corrects the perspective to ensure the best view, while improving the image in real time by reducing shine, gloss, and shadows, and enhancing color and contrast of marker strokes. A secondary content camera stream allows you to display both the whiteboard and those present in the meeting at the same time in dual streams.

The recommended size of the whiteboard should be between 1.5-2.7 meters in width (5-9 feet), however whiteboards measuring between 1-3 meters in width (3-10 feet) are supported.

10.1 Position the whiteboard

It is recommended that the whiteboard should be positioned within 3.6 meters (12 feet) of the Jabra PanaCast 50, and no closer than 1.5 meters (5 feet). The optimal viewing range is 3 meters (9 feet).


It is important to note the Jabra PanaCast 50 camera consists of three separate lenses, arranged horizontally. The whiteboard **MUST** be positioned entirely within the view of one of these three lenses.

It is recommended to use a standard whiteboard, rather than glass or highly reflective surface. For the best clarity, use black or dark markers to write on the whiteboard.

10.2 Set up whiteboard view

Before a whiteboard can be shared in a video conference, a whiteboard view must be set up using Jabra Direct.


To set up a whiteboard view, go to **Whiteboard view setup** under the **Camera** settings in Jabra Direct and then click **Set up**. Jabra Direct will guide you through the process of setting up a whiteboard view.

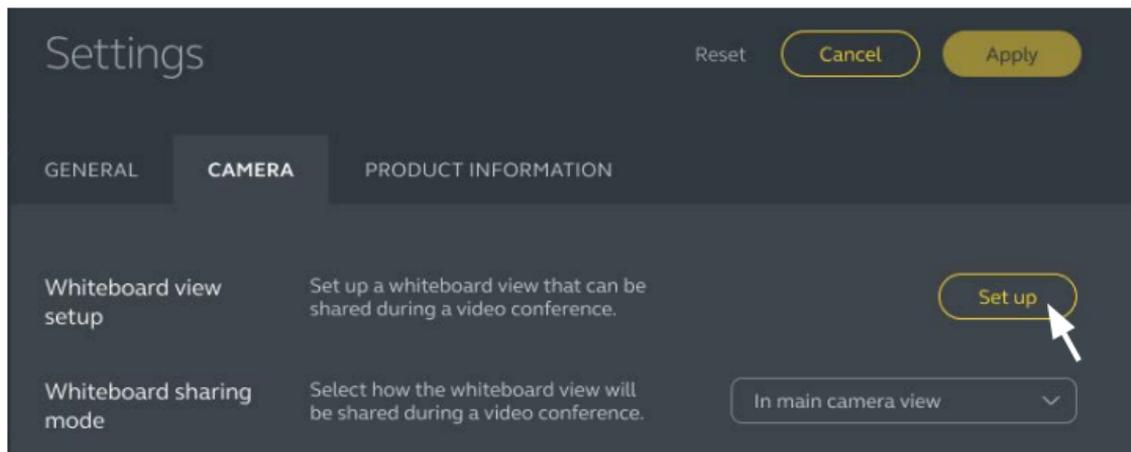

10.3 Share the whiteboard in the main camera view

If the **Whiteboard sharing mode** in Jabra Direct is set to Main camera view, toggling the whiteboard view on/off using the camera controller in Jabra Direct or Jabra Sound+ or the remote control will switch between the view of the meeting and the view of the whiteboard.

By default, the **Whiteboard sharing mode** in Jabra Direct is set to Main camera view. This setting can be configured using Jabra Direct.

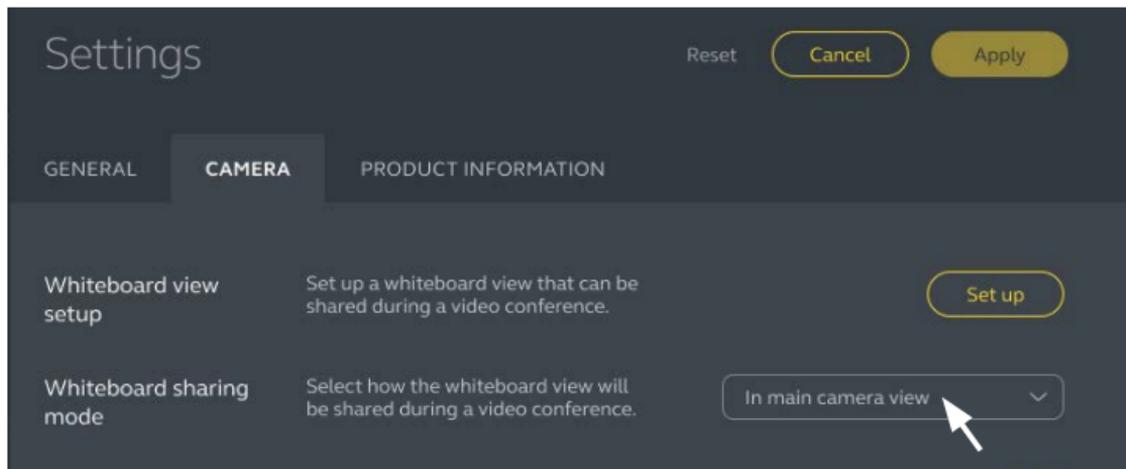

10.4 Share a separate view of the whiteboard in Microsoft Teams Rooms

The whiteboard view can be shared in Microsoft Teams Rooms as a separate content camera view, which will open a separate video stream of the whiteboard.

1. Launch Jabra Direct on a separate laptop (not the Microsoft Teams Rooms unit) and ensure the Jabra PanaCast 50 device is selected.
2. Select **Settings** to open the settings menu.
3. Select the **Camera** tab.
4. Set the **Whiteboard sharing mode** as **In separate content camera view**.
5. Select **Whiteboard view setup** to create the boundaries of the whiteboard view.
6. Launch Microsoft Teams Rooms on the Microsoft Teams Rooms unit.
7. Select **Settings** to open the settings menu.
8. Under **Camera Defaults**, select **Jabra PanaCast 50** as the content camera, and ensure that the **Content enhancements** option is selected.

10.5 Share a separate view of the whiteboard in Zoom Rooms


The whiteboard view can be shared in Zoom Rooms as a separate content camera view, which will open a separate video stream of the whiteboard.

1. Launch Jabra Direct and ensure the Jabra PanaCast 50 device is selected.
2. Select **Settings** to open the settings menu.
3. Select the **Camera** tab.
4. Set the **Whiteboard sharing mode** as **In separate content camera view**.
5. Launch Zoom Rooms.
6. Click your account profile icon in the top right corner of Zoom.
7. Select **Settings** to open the settings menu.
8. In the **Video** tab, select **Jabra PanaCast 50 Content Camera** as the content camera.

11. Remote control (optional accessory)

11.1 How to pair the remote control


1. Press and hold the Bluetooth button on the back of the Jabra PanaCast 50 for 5 seconds until the LED on the camera flashes blue and green. This LED notification indicates that the Jabra PanaCast 50 is in pairing mode.
2. Press and hold the Mute button on the remote control for 5 seconds until you hear an audio notification on the Jabra PanaCast 50. This audio notification indicates that the remote control and the Jabra PanaCast 50 are paired.

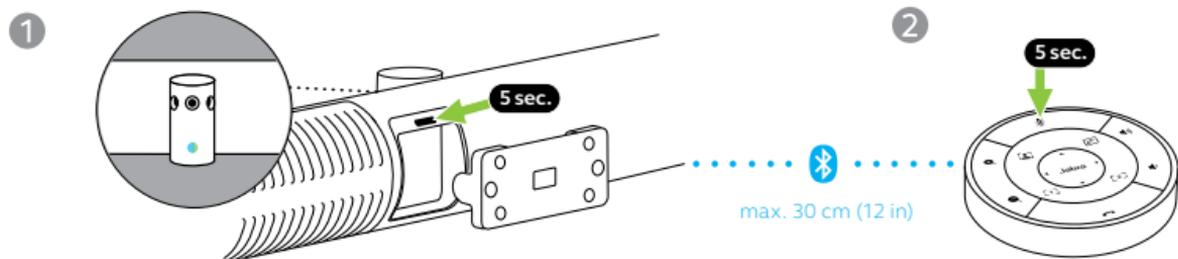


To pair, the remote control must be within 30 centimeters (12 inches) of the Jabra PanaCast 50.

11.2 How to use the remote control

The range of the remote control is 10 meters (30 feet).

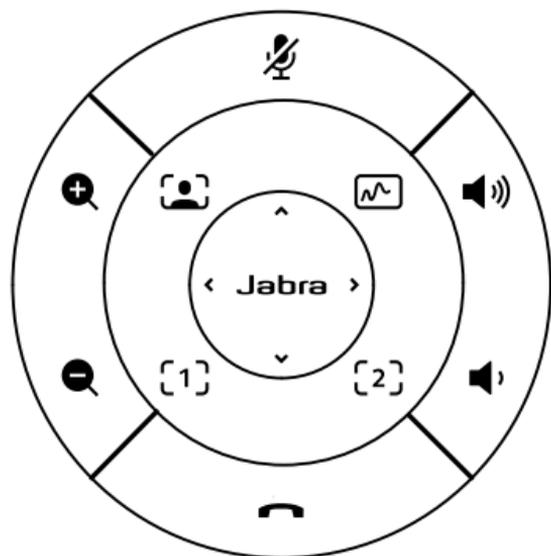

- | | | | |
|---|---|---|-------------|
|  | Mute/unmute microphone
Pair with PanaCast 50 (<i>hold</i>) |  | End call |
|  | Turn Intelligent Zoom on/off |  | Zoom in |
|  | Turn Whiteboard view on/off |  | Zoom out |
|  | Select Preset 1
Save Preset 1 (<i>hold</i>) |  | Volume up |
|  | Select Preset 2
Save Preset 2 (<i>hold</i>) |  | Volume down |
|  | Adjust camera view | | |

12.Support

12.1 FAQ and technical specifications

View the FAQ, certifications, and technical specifications at jabra.com/help/panacast50

12.2 How to care for your Jabra device

- The Jabra PanaCast 50 is for indoor use only.
- Avoid direct sunlight and temperatures above 30°C/104°F or below 0°C/32°F.
- Do not expose the camera or cables to rain or other liquids.
- Do not position the camera near the vents of a monitor or TV as this may cause the camera to overheat and malfunction.
- Clean the cloth surface with a cloth dampened with a mild soap solution.

12.3 How to factory reset

Resetting will restore the Jabra PanaCast 50 to its factory default settings.

1. Press and hold the Reset button on the back of the Jabra PanaCast 50 for 5 seconds until the LED flashes pink and you hear an audio notification.
2. The Jabra PanaCast 50 will reboot and play another audio notification when ready for use. The reboot takes approx. 1 minute.